


Compact Panel Computers

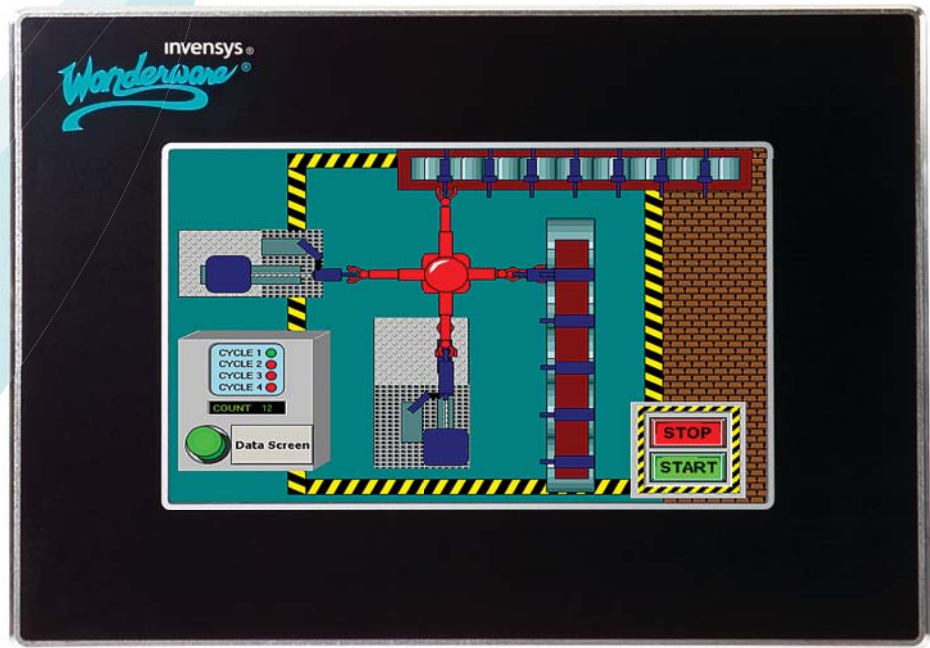

FEATURES

- Bright/high contrast, 32 bit color, long-life TFT LCD display with touch screen for user input
- Fanless system with long life EMC design and materials
- Lightweight chemical resistant stainless steel front bezel
- Rated IP65 and NEMA 4X (indoor use only), easy installation, RoHS compliant
- 24 VDC Powered
- Secure Microsoft Windows CE 6.0 environment with MUI for English, German, French, Japanese, and Simplified Chinese
- Intel Celeron M 600 MHz CPU, 256MB to 1GB RAM, with 1GB CompactFlash
- Includes InTouch Compact Edition runtime software

- Limited 24 months warranty (parts and labor)
- Standardize on one HMI throughout your facility from high end to low end

OPTIONS

- Extended warranties to 36 or 48 months
- OS & InTouch software upgrade kit – Features hard disk drive capable of running Windows XP Professional and InTouch 10.0 software with 1000 tags on 10 and 15 inch systems



Powering intelligent plant decisions in real time.

COMPACT PANEL COMPUTER SPECIFICATIONS

| FEATURES | 7" | 10" | 15" |
|-----------------------------------|---|---|--|
| Display | | | |
| Type | | 32 bit color TFT-LCD | |
| Size/Resolution | 800x480 | 800x600 | 1024x768 |
| Bezel Options | | Stainless Steel with black, flat front | |
| PC Data | | | |
| Pre-Installed Software | InTouch Compact Edition runtime software licensed for 1000 tag with I/O | | |
| Operating System | Microsoft Windows CE 6.0 | | |
| Processor | Intel Celeron M 600MHz CPU | | |
| Memory | 256MB | 1GB | 1GB |
| Drive Media | 1GB CompactFlash | | |
| I/O Ports | 1-RS232, 1-RS422/485, 1-VGA, 2-USB | | |
| Network | 2 - 10/100 NIC ports | | |
| Overall Dimensions (WxHxD) | 9.25 x 6.61 x 1.98in 235 x 168 x 50.3mm | 13.7 x 10.91 x 1.97in 348 x 277 x 50mm | 17.69 x 13.94 x 2.19in 449.4 x 354 x 55.6mm |
| Cut-out Dimensions (WxH) | 8.5 x 5.8in 216 x 148mm | 11.7 x 9.3in 296 x 235mm | 16.1 x 12.3in 408 x 312mm |
| Weight (lb/kg) | 6/2.7 | 10/4.5 | 20/9 |
| Electrical | | | |
| Rated Input Power | 24VDC , 2.5 amps, 60 Watts max. (100-240VAC/24VDC adapter available seperately) | | |
| Environmental | | | |
| Thermal Management | Passive fanless cooling | | |
| Temperature | 0 to 50° C / 32 to 122° F | | |
| Operating Humidity | 5 to 95% non-condensing | | |
| Shock | DIN EN 60068-2-6 / Operating: 15G, 11 ms duration / Storage: 50G, 11 ms duration, half-sinusoidal | | |
| Vibration | Operating: 10-500 Hz: 1G / 3 axis - Storage: 10-500 Hz: 2G / 3 axis | | |
| Altitude | Operating: 10,000 ft (3,048m) / Storage: 15,000 ft (4,622m) | | |
| Protection Class | IP65, NEMA 4X (Indoor only) designed | | |
| MTBF | 50,000 hours, excluding backlight | | |
| Certifications | | | |
| Safety Standards | | | |
| EUROPE | CE | | |
| U.S.A./Canada | UL/cUL | | |
| EMC Standards | | | |
| EUROPE | EN61000-6-2; EN55022/A (CISPR22) | | |
| U.S.A./Canada | FCC47 CFR PART 15; Class A level | | |

*Note: Specifications are subject to change.



Wonderware • 26561 Rancho Parkway South, Lake Forest, CA
 92630 U.S.A. • Tel: 949-727-3200 • Fax: 949-727-3270
 www.wonderware.com

© 2008 Invensys Systems, Inc. All rights reserved. No part of the material protected by this copyright may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, recording, broadcasting, or by any information storage and retrieval system, without permission in writing from Invensys Systems, Inc.

Invensys, Wonderware, ArchestrA, ActiveFactory, DT Analyst, FactorySuite, FactorySuite A2, InBatch, InControl, IndustrialSQL Server, InSQL, InTouch, InTrack, QI Analyst, SCADAAlarm, SuiteLink, SuiteVoyager, "Every system in your plant, working in concert", WindowMaker, WindowViewer and WonderWorld are trademarks of Invensys plc, its subsidiaries and affiliated companies. Microsoft and Windows are registered trademarks of Microsoft Corporation. All other brands and product names may be the trademarks or service marks of their respective owners.